



4088 Directional Headset Microphone

TABLE OF CONTENTS


Specifications	1
----------------	---

Specifications


Directional pattern	Cardioid
Principle of operation	Pressure gradient
Cartridge type	Pre-polarized condenser
Frequency response	20 Hz - 20 kHz

Effective frequency range, ± 2 dB, Near field 2-3 cm (0.8 - 1.2 in)	100 Hz - 20 kHz (4 - 6 dB soft boost at 15 kHz)
Sensitivity, nominal, ± 3 dB at 1 kHz	6 mV/Pa; -44 dB re. 1 V/Pa
Equivalent noise level, A-weighted	Typ. 26 dB(A) re. 20 μ Pa (max. 28 dB(A))
Equivalent noise level, ITU-R BS.468-4	Typ. 38 dB (max. 40 dB)
Distortion, THD < 1% - Legacy	120 dB SPL RMS, 123 dB SPL peak
Distortion, THD < 1% - CORE	134 dB SPL RMS, 137 dB SPL peak
Dynamic range - Legacy	Typ. 97 dB
Dynamic range - CORE	Typ. 111 dB
Max. SPL, THD 10%	144 dB SPL peak
Rated output impedance	30 - 40 Ω
Cable drive capability	Up to 300 m (984 ft) with DAD6001-BC XLR Adapter
Power supply (for full performance)	For wireless systems: Min. 5 V - max. 10 V through DPA adapter With DAD6001-BC: P48 (Phantom Power). Will work from 12 V
Current consumption	Typ. 1.5 mA (microphone). 3.5 mA with DAD6001-BC XLR Adapter
Connector	MicroDot, TA4F Mini-XLR, 3-pin LEMO, Mini-Jack
Color	Black, beige or brown
Weight	14 g (0.5 oz) incl. Cable and MicroDot connector
Microphone diameter	5.4 mm (0.21 in)
Microphone length	11 mm (0.5 in)
Cable length	1.2 m (3.9 ft)
Cable diameter	1.6 mm (0.06 in)


Polarity	Positively increasing sound pressure produces positive going voltage on MicroDot pin
Temperature range	-40°C to 45°C (-40°F to 113°F)
Relative humidity (RH)	Up to 90%

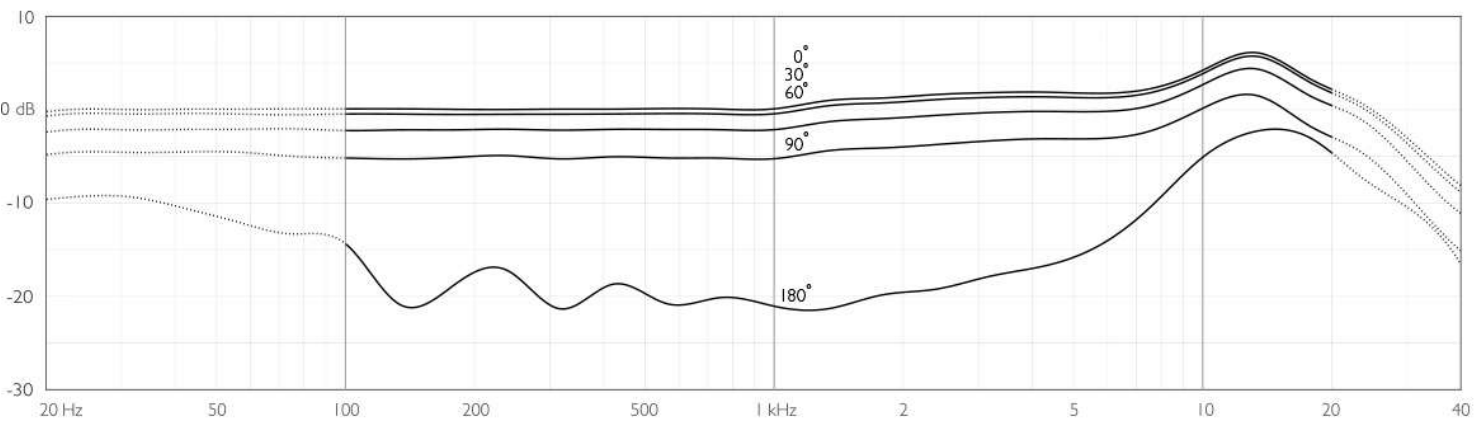

Typical on and off-axis response of a 4088 measured at 2-3 cm (0.8 - 1.2 in)

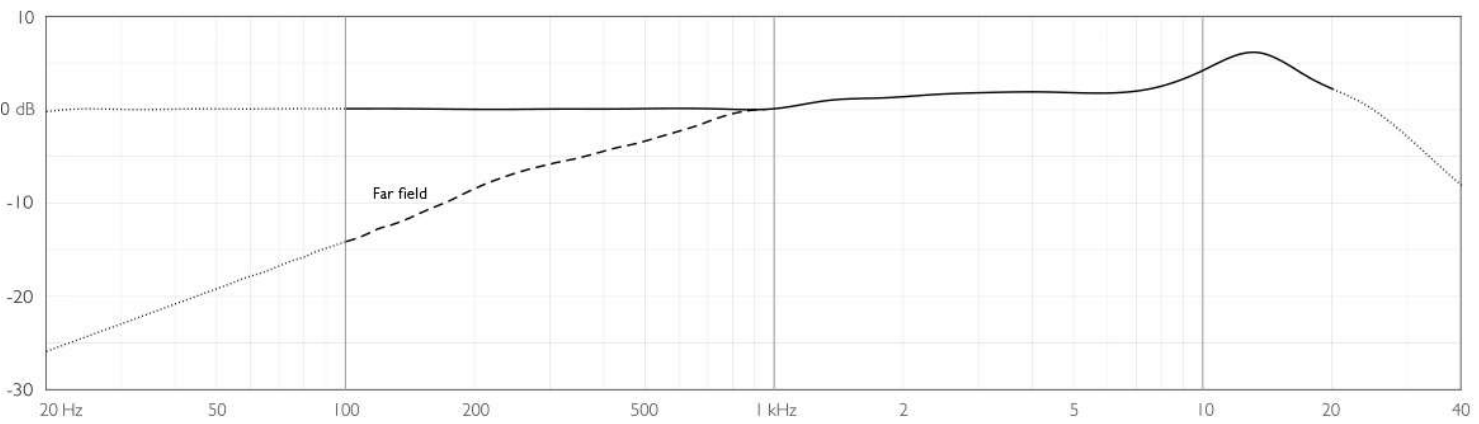

Frequency response of the 4088 in near and far field

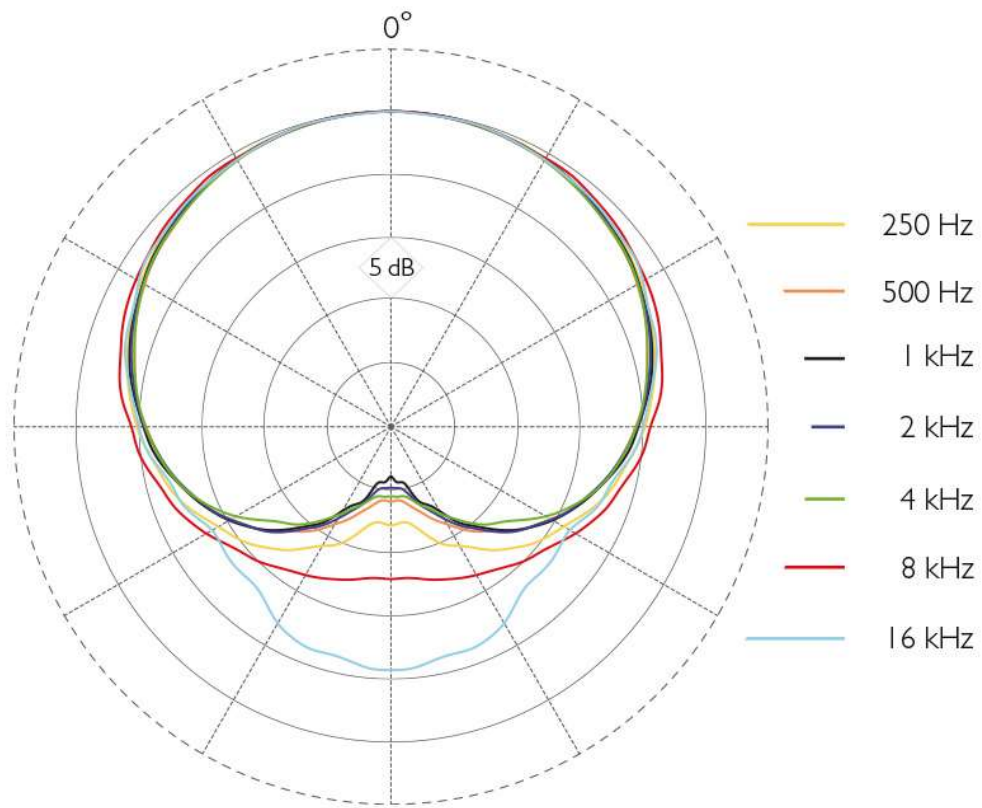

Typical directional characteristics of a 4088