



4011 Cardioid Microphone - Gooseneck

TABLE OF CONTENTS

Specifications - 4011F	1
------------------------	---

Specifications - 4011F

Directional pattern	Cardioid
Principle of operation	Pressure gradient
Cartridge type	Pre-polarized condenser
Frequency response	20 Hz - 20 kHz


Effective frequency range, ± 2 dB, at 30 cm (11.8 in)	40 Hz - 20 kHz
Sensitivity, nominal, ± 2 dB at 1 kHz	10 mV/Pa; -40 dB re. 1 V/Pa
Equivalent noise level, A-weighted	Typ. 18 dB(A) re. 20 μ Pa (max. 20 dB(A))
Equivalent noise level, ITU-R BS.468-4	Typ. 25 dB (max. 27 dB)
Distortion, THD < 1%	136 dB SPL RMS, 139 dB SPL peak
Dynamic range	Typ. 121 dB
Max. SPL, THD 10%	144 dB SPL peak
Rated output impedance	100 Ω
Minimum load impedance	2 k Ω
Cable drive capability	100 m (328 ft)
Output balance principle	Impedance balancing
Common mode rejection ratio (CMRR)	> 40 dB
Power supply (for full performance)	P48 (Phantom Power)
Current consumption	3.5 mA
Connector	XLR-3M. Pin 1: shield, Pin 2: signal + phase, Pin 3: - phase
Color	Matte black
Microphone diameter	19 mm (0.75 in)
Capsule diameter	19 mm (0.75 in)
Microphone length	Capsule: 23 mm (0.9 in), Boom poles: 20 cm (8 in), 32 cm (13 in), 47 cm (18 in), 77 cm (30 in), 122 cm (48 in)
Maximum output voltage, RMS	2.2 V
Polarity	+V at pin 2 for positive sound pressure

Temperature range -40°C to 45°C (-40°F to 113°F)


Relative humidity (RH) Up to 90%

Matching tolerance (frequency response and sensitivity) ± 1 dB

Phase deviation for kit $< 10^\circ$

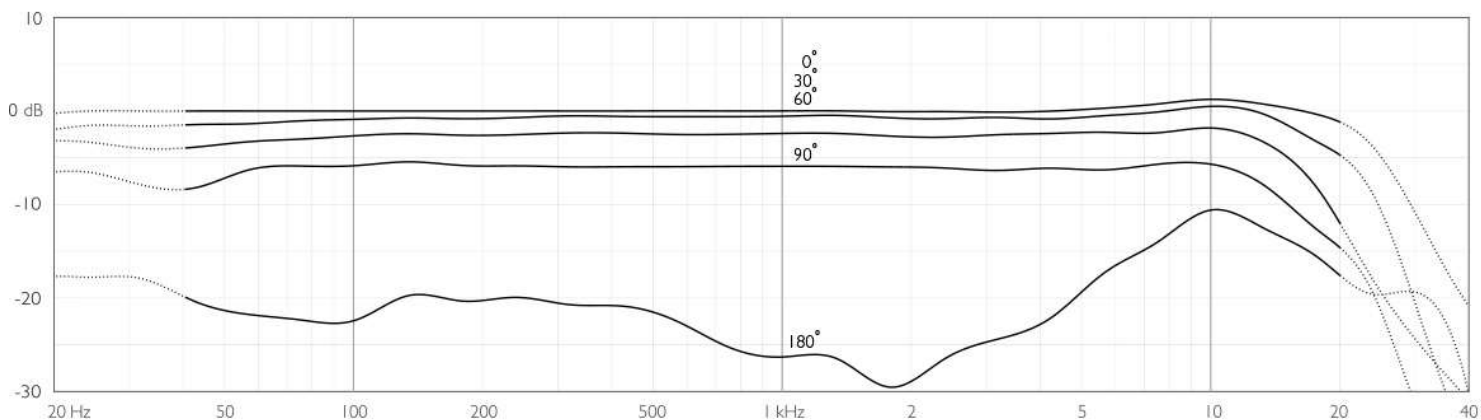

Typical on and off-axis response of DPA 4011

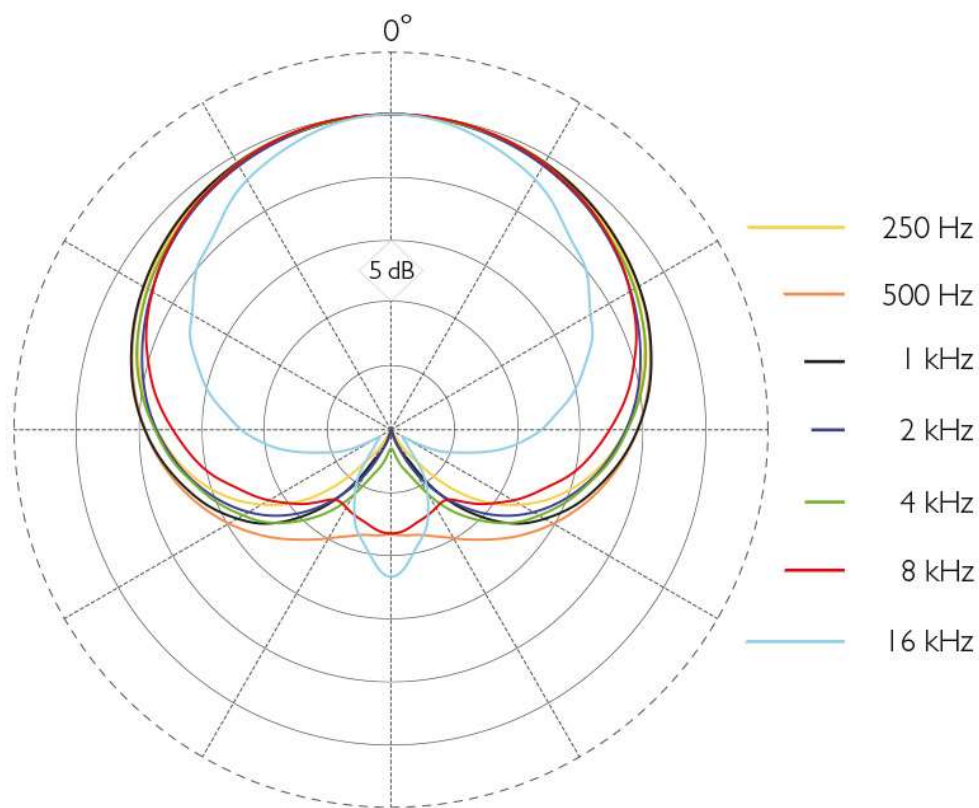

Typical directional characteristics of DPA 4011